



# CORRUGATED PLIABLE CONDUITS

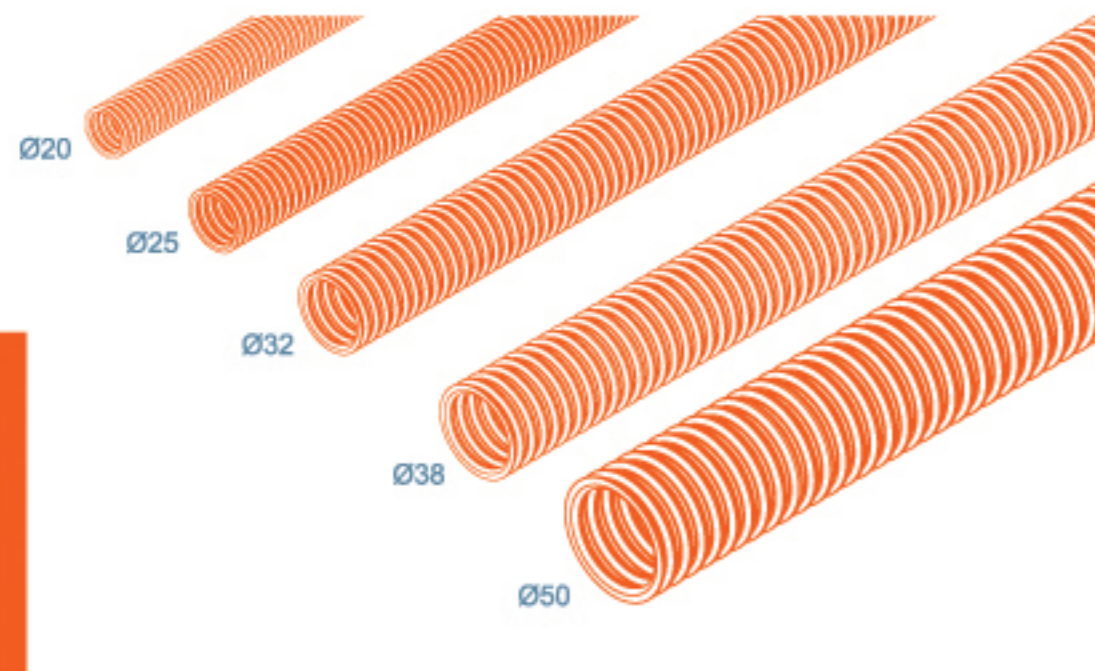


**Material** : **Super High Impact PVC-U**  
**Ref. Standards** : BS EN 50086-2-2, BS EN 61386-22, EN 60423  
 : IEC 60614-2-3 and SSA 254/255. Relevant IEE regulations  
**Standard colour** : Black (B)-RAL 9004, White (W)-RAL 9010 & Grey (G)-RAL 7035  
*Add suffix 'B', 'W' or 'G' with the Part Number, while ordering.*  
**Standard length** : 25 meters. Alternative lengths can be supplied to order.  
**Temperature rating** : - 5 °C to + 60 °C

## Corrugated Pliable Conduits Super High Impact PVC-U

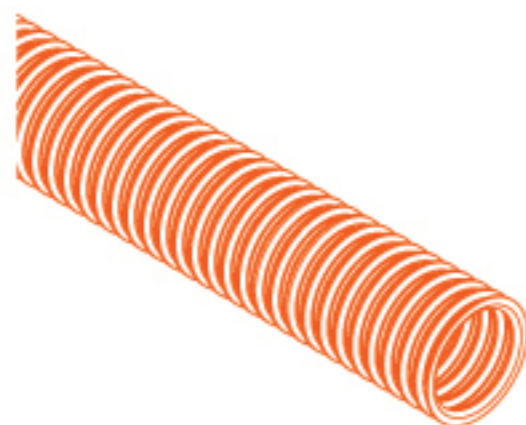

Size Outside dia ø, mm	Part Number
20	FCH 20
25	FCH 25
32	FCH 32
38	FCH 38
50	FCH 50

## Corrugated Pliable Conduits Light Impact PVC-U

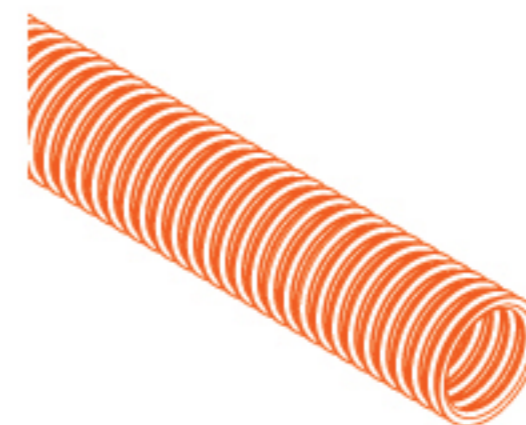

Size Outside dia ø, mm	Part Number
20	FCL 20
25	FCL 25
32	FCL 32
38	FCL 38
50	FCL 50