



CORRUGATED PLIABLE CONDUITS

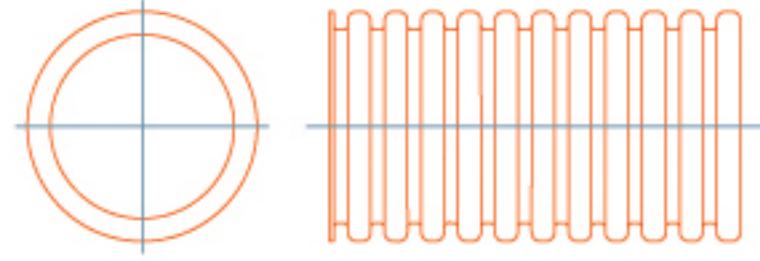

CONDUIT CROSS SECTION

- Material** : **Super High Impact, Lead Free PVC-U**
Ref. Standards : BS EN 50086-2-2, BS EN 61386-22, EN 60423
: IEC 60614-2-3 and SSA 254/255. Relevant IEE regulations
Standard colour : Black (B)-RAL 9004, White (W)-RAL 9010 & Grey (G)-RAL 7035
Add suffix 'B', 'W' or 'G' with the Part Number, while ordering.
Standard length : 25 meters. Alternative lengths can be supplied to order.
Temperature rating : - 5 °C to + 60 °C

Corrugated Pliable Conduits Super High Impact, Lead Free PVC-U

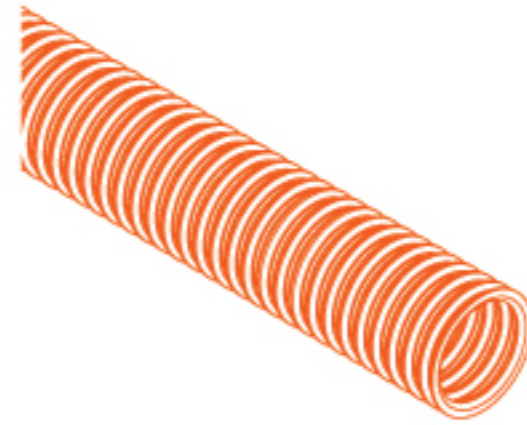

Size Outside dia ø, mm	Part Number
20	FCH 20 _{LF}
25	FCH 25 _{LF}
32	FCH 32 _{LF}
38	FCH 38 _{LF}
50	FCH 50 _{LF}

Corrugated Pliable Conduits Light Impact, Lead Free PVC-U



Size Outside dia ø, mm	Part Number
20	FCL 20 _{LF}
25	FCL 25 _{LF}
32	FCL 32 _{LF}
38	FCL 38 _{LF}
50	FCL 50 _{LF}